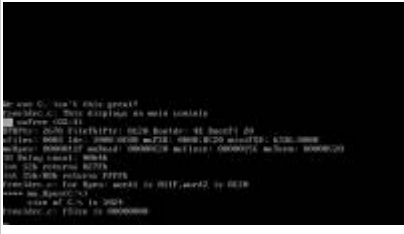
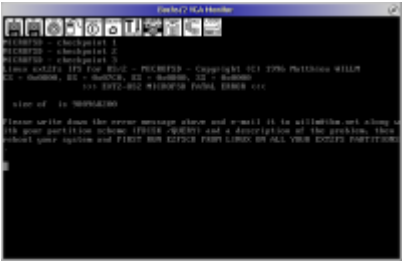
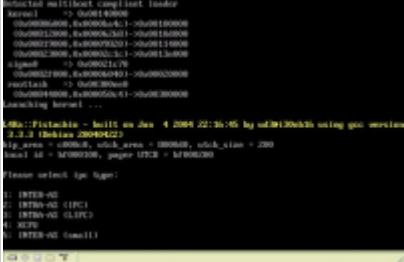
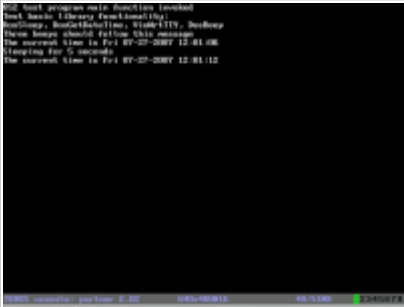



Click on a thumbnail to enlarge. Oldest screenshots are shown first.

Version 0.0.2

All screenshots in this section are of software currently under development.

Boot Sequence 	With Original Bootsector 
Boot Sequence with LILO¹⁾ 	OS/2 Test Application²⁾ 
OS/2 Application Output³⁾ 	

Version 0.0.3

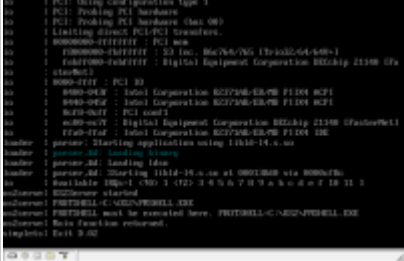OS/2 Personality server⁴⁾ 	
FreeLdr boot menu⁵⁾ 	FreeLdr boot menu⁶⁾ 

[illegible]

OS/2 LX Executable (Win32 host) ⁷⁾	OS/2 LX Executable (L4 host) ⁸⁾
FreeDOS startup	argv.exe (arguments and environment test)
sort.exe (DosOpen test)	

FreeLDR 0.0.5 main screen

```

FreeLDR 0.0.5
Copyright (c) 2005
All rights reserved.

mov $0, %eax
mov $0x100000, %ecx
mov $0x100000, %edx
mov $0x100000, %ebx
mov $0x100000, %esi
mov $0x100000, %edi
mov $0x100000, %ebp
mov $0x100000, %esp
mov $0x100000, %eip

```

<http://185.82.219.184/doku/>

2)

Here you can see result of GRUB, Bootstrap, Fiasco and core servers with ongoing port/reimplementation of OS2Linux for L4 microkernel. Output to log server.

3)

Same as above, but output to graphical L4Con console.

4)

CONFIG.SYS already parsed and start of PROTSHELL execution

5)

simple menu

6)

full-featured menu

7)

This is native OS/2 application in LX format executed under OS/2 Personality server on top of Win32 host

8)

This is native OS/2 application in LX format executed under OS/2 Personality server on top of L4 host

9)

menu screen

From:

<http://185.82.219.184/doku/> - **osFree wiki**

Permanent link:

<http://185.82.219.184/doku/doku.php?id=en:screenshots&rev=1362720065>

Last update: **2013/03/07 23:00**

